



Double Push Panic Button


Code: PADP3/SS/BK

Panic Button | Double Push | Grade 3 | Stainless Steel / Black | Key Resettable

CQR manufacture two ranges of Double Push Panic Buttons, providing a discreet method of raising the notification of a potential threat, with the reduced possibility of false activation due to having two buttons for activation. The Grade 3 version of our Double Push Panic buttons are fitted with a selection of end of line resistors and cover / optional removal from mounting tamper. Available in white and stainless steel finishes, with key reset.

Features & Benefits

- Latching / non-latching
- Selectable for Normally Open / Normally Closed
- Indicator to show activation
- Microswitch Alarm and Tamper
- Selectable End of Line Resistors
- Key Resettable
- Spare keys available

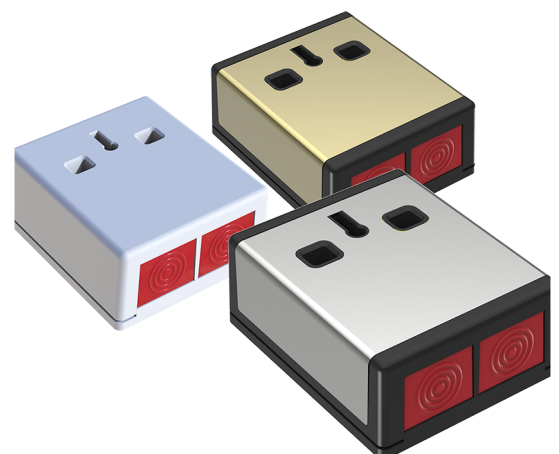

Product Information

Connection Type	Terminals
-----------------	-----------

Security

EN50131-1 Grade	3
Tamper Protection	Cover & RFMS

Environmental

EN50130-5 Class	II
IP Rating	4X
Temperature Range	-10° C to +40° C

Housing

Colour	Stainless Steel / Black
Material	ABS
Dimensions (mm)	62 x 75 x 30

Electrical

Connection Type	Terminals
Switch Rating	12v DC 3A

Features

Visual Indication	Yes
Features Selected by	Jumper
Reset Method	Key
Confirmed Output	No
Operation Mode	Push
Timed	No
Mounting Method	Surface
Built-in Resistor Types	A, B, D, E, I
No. Terminals	4

Mechanical

Mounting Method	Surface
-----------------	---------