

## **Overview**

The RH3+ Handset allows an occupant of a dwelling to answer a call from a visitor at a communal entrance and have a two-way simultaneous conversation. They can then enable the remote operation of the electric locking device to permit the visitor access.

The RH3+ is constructed from hard wearing ABS plastic which has good mechanical properties; impact resistance and toughness. The handset is a 'surface mount' design for easy installation.

The RH3+ is compatible with Entrotec Apex and Elite systems, and various 3rd party systems and allows you to repair and maintain other manufacturers' door entry systems.

## **Features**


TCall tone amplifier for systems with electronic call tones or AC buzz tone

Piezo buzzer for DC or AC call voltage signal

Piezo buzzer can be used as an independent second sounder, over-riding the call tone amplifier if both operating (alarm mode)

Positive or negative going door status indicator



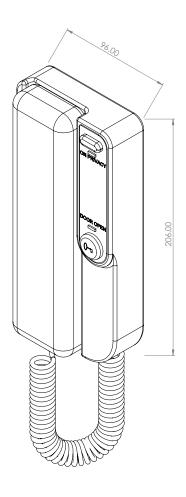

## **Technical characteristics**

Buttons	Plastic tactile function buttons:
Door Release	Momentary, Illuminated Green LED
Privacy	Momentary, Illuminated Red LED. Latches on/off (no timeout)
Call Tone	Pulsed Tone with Volume Adjustment
Volume	84dB SPL Max (at 1 metre)
Operating Voltage	12-15VDC (13.8V Nominal)
Power	~0.01W Idle, 2.6W Active
Connections	11 Way Screw Terminals
Dimensions	(WxHxD) 96 x 206 x 49mm (approx. not including cable)