

VAS/100.30


Power supply unit



Supplementary 17.5 V DC - 1700 mA power supply unit

- Plastic container for installing in EN50022 electrical panels, and eight-DIN low modules.
- Full control board for powering, 17.5 V DC - 1700 mA max., entry panels and indoor receivers, protected from overloads and short circuits.
- 230 V AC 50/60 Hz supply from the power grid.
- IP30 water and dust protection rating.

Dimensions (mm)

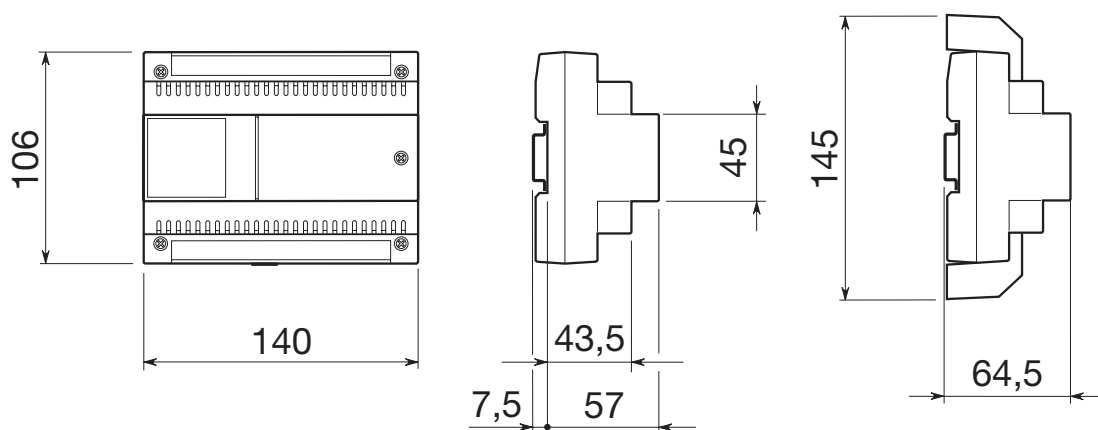

Technical characteristics

MODELS	VAS/100.30
Power supply (V AC)	230
Max current draw at (mA AC)	250
Max dissipated power (W)	10
Rated power supply (V DC)	17.5
Rated current (A)	1,7
DIN modules EN 50022 35x7.5 (n°)	8
Storage temperature (°C)	-25 to +70
Operating temperature (°C)	0 to +35
Protection rating (IP)	30