



- PIN Access
- Mechanical Pushbutton Lock
- Single Access Code
- Fits Narrow Stile Aluminum Glass Doors
- Thumbturn

### Features

<b>Access Control:</b>	Mechanical pushbutton lock—eliminates problems and costs associated with issuing, controlling, and collecting keys and cards. Provides exterior access by combination.
<b>No Battery:</b>	Fully mechanical lock eliminates the material and labor expense of battery replacements
<b>Locking Device Options:</b>	Adams Rite 4510/4710/4910 mortise latch
<b>Number of Codes:</b>	Single access code—one easy to manage code for all users
<b>Programming:</b>	Lock is easily programmed via keypad without removing lock from the door
<b>Handing:</b>	Non-handed; Required drive assembly is factory handed—not field reversible
<b>Key Override:</b>	Accepts Maximum Security (MS) mortise cylinders; can be used to override the lock combination and gain access using a key. Allows facilities to initiate or maintain a master-keyed security system (keyed alike or keyed differently).
<b>Operation Modes:</b>	Single credential—access Passage—Allows access without using the lock entry code. Feature activated from the outside using cylinder override key. Lockout—Disables the lock so that entry codes cannot be used to gain access. Access is permitted using the key override only. This is activated from the outside using the cylinder override key.
<b>Economical:</b>	A cost effective access control solution

### Mechanical Features

<b>Construction:</b>	All metal cast front housing, force-proof, clutch-protected fixed thumbturn
<b>Numeric Keypad:</b>	Vandal resistant, solid metal pushbuttons
<b>Handing:</b>	Non-handed; Required drive assembly is factory handed—not field reversible
<b>Finishes:</b>	Satin Chrome 26D (626); 55 (695) Duranodic
<b>Backset:</b>	Model 3010: Right Hand; Right Hand Reverse— $3\frac{1}{32}$ " (25 mm) Model 3020: Left Hand; Left Hand Reverse— $3\frac{1}{32}$ " (25 mm) Model 3030: Right Hand; Right Hand Reverse— $1\frac{1}{8}$ " (29 mm) or $1\frac{1}{2}$ " (38 mm) Model 3040: Left Hand; Left Hand Reverse— $1\frac{1}{8}$ " (29 mm) or $1\frac{1}{2}$ " (38 mm)
<b>Latch:</b>	Purchased separately (Adams Rite)
<b>Stile Width:</b>	$1\frac{7}{8}$ " (48 mm) minimum, required for mounting
<b>Door Thickness:</b>	$1\frac{3}{4}$ " (44 mm) maximum
<b>Weight:</b>	4 lbs. (1.8 kg)
<b>Strike:</b>	Purchased separately (Adams Rite)
<b>Items Supplied Include:</b>	Installation instructions, full-scale template, combination change key, and screwdriver

### Certification and Testing


**Durability:** Highly weather resistant

### Warranty


**Warranty:** 1-year warranty

### Narrow Stile Aluminum Door Lock

SIMPLEX®

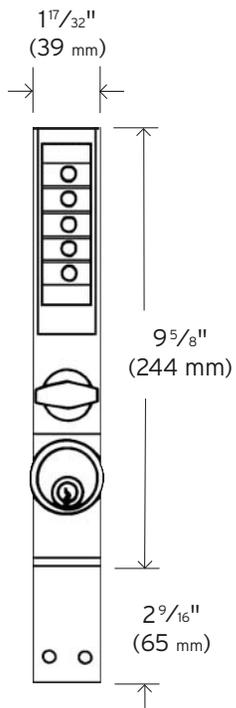


**Exterior**

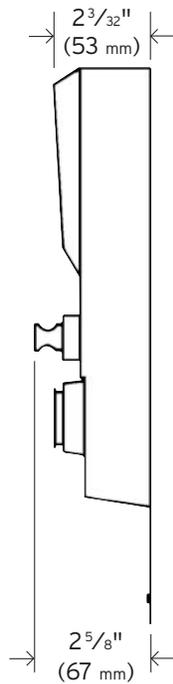


**Exterior Side**

#### Model 3001




- Combination Entry
- Key Override (not supplied)
- Passage
- Lockout

#### Model 3002



- Combination Entry
- Key Override (not supplied)
- Passage
- Lockout
- Cylinder Guard

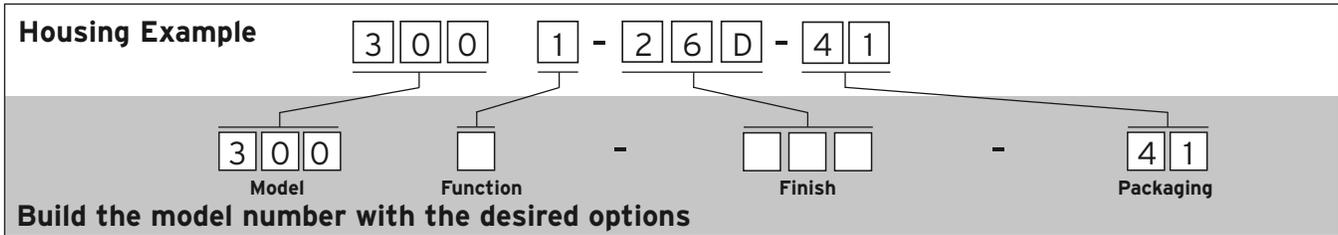

Base Model	Description
300126D41	Narrow Stile Lock with Thumbturn, Key Override, Passage, Lockout

### Choose one option from each category

Function Options	Description
1	Combination Entry, Key Override, Passage, Lockout
2	Combination Entry, Key Override, Passage, Lockout, Cylinder Guard


Finish Options	Description
26D	Satin Chrome (626)
55	Duranodic (Powder Paint)

### Notes

**Cylinder not included**

**A complete installation requires both a housing and a drive assembly**

**Must order backset and inside hardware separately**

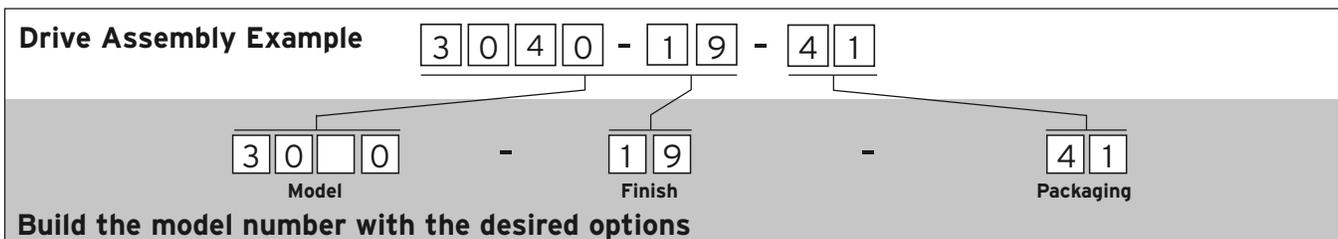

Base Model	Description
3010-19-41	Right Hand; Right Hand Reverse 3 <sup>1</sup> / <sub>32</sub> " (25 mm) backset
3020-19-41	Left Hand; Left Hand Reverse 3 <sup>1</sup> / <sub>32</sub> " (25 mm) backset
3030-19-41	Right Hand; Right Hand Reverse 1 <sup>1</sup> / <sub>8</sub> " (29 mm) or 1 <sup>1</sup> / <sub>2</sub> " (38 mm) backset
3040-19-41	Left Hand; Left Hand Reverse 1 <sup>1</sup> / <sub>8</sub> " (29 mm) or 1 <sup>1</sup> / <sub>2</sub> " (38 mm) backset

### Simplex® 2015 Series

Model	Description
54266	Blank Keys
54266-1-11	Master Keys for key override models. (Old #54266-1) (Specify Keycut)
54266-2-11	Service Keys for override models. (Old #54266-2) (Specify Keycut)

### Simplex® 6200 Series

Model	Description
55072-03-01	Filler Plate—Bright Brass
55072-26D-01	Filler Plate—Satin Chrome
55072-19-01	Filler Plate—Black

### Simplex® 900 Series

Model	Description
800-04-41	Adapter kit for doors with metal frames. Includes riser plates and surface mounted strike. Finish 04 Satin Brass; packaged 1 per box. (Old #74464/74468)
800-26D-41	Adapter kit for doors with metal frames. Includes riser plates and surface mounted strike. Finish 26D Satin Chrome; packaged 1 per box. (Old #74464/74468)
805-26D-41	Face plate shield. Not for use with key override models. Inhibits unauthorized observation of the combination. Finish 26D Satin Chrome; packaged 1 per box. (Old #24081-000-01)
54266	Blank Keys
54266-1-11	Master Keys for key override models. (Old #54266-1) (Specify Keycut)
54266-2-11	Service Keys for key override models (Old # 54266-2) (Specify Keycut)

### Simplex® 1000, L1000 & 5000 Cores & Wrap Plates

Model	Description
204231-03-41	Wrap Plate, 10 ½" (267 mm), Bright Brass (605)
204231-05-41	Wrap Plate, 10 ½" (267 mm), Antique Brass (609)
204231-26D-41	Wrap Plate, 10 ½" (267 mm), Satin Chrome (626)
204232-03-41	Wrap Plate, 15" (381 mm), Bright Brass (605)

204232-05-41	Wrap Plate, 15" (381 mm), Antique Brass (609)
204232-26D-41	Wrap Plate, 15" (381 mm), Satin Chrome (626)
20484-03-01	Best Equivalent SFIC Bright Brass (605)
201484-05-01	Best Equivalent SFIC Satin Brass (609)
201484-26D-01	Best Equivalent SFIC Satin Chrome (626)
201600-083-01	Anti-Spy Shield (1000/L1000 Models Only)
204022-000-01	Latch Extension Assembly converts to 3¾" (10 cm) Backset
204023-000-01	Latch Extension Assembly converts to 5" (13 cm) Backset
54644-000-41	Weather Cover (smoke colored)
64754-000-01	Lubriplate Aero Grease Tubes (1.75 oz tubes) 150°F to -70°F (66°C to -57°C)
64684-26D-01	Installation Jig (1000/L1000/5000/E5000)

### Simplex® Mounts\*

Model	Description
204246-000-41	<b>LD Series—450 &amp; 470</b> Dual Mount
04083-000-41	<b>8100</b> Series
204086-000-41	<b>EE1000</b> Series
204087-000-41	<b>LP1000</b> Series
203053-000-41	<b>900</b> Series— <b>904 &amp; 919</b> Dual Mount
204189-000-41	<b>7100</b> Series— <b>7108 &amp; 7104</b> Dual Mount
204092-000-41	<b>7100</b> Series—( <b>7106</b> Series Only)
204094-000-41	<b>6200</b> Series
204096-000-41	<b>2015</b> Series
203044-000-41	<b>1000, L1000, 5000</b> Series
74378-CH	<b>3000</b> Series Narrow Stile
SP5000 ACLMT	Simplex <b>5000</b> Acrylic Mount

\* Mounts do not include locks

Hardwood product demonstration mount, packaged 1 per box.